User Manual

LED DIMMING Controller

Product Specialty

●0-100% brightness control, 256 levels;

●On/off function;

●1 channel can drive up to 15A;

●0%, 25%, 50%, 75%, 100% brightness pre-saved;

●Pre-saved fade, flash changing mode,

●8 scale speed;

Product Attributes

Vin	DC 12/24V
Pout	12V: 180W; 24V: 360W
Size	155*40*30mm
Weight	78g

Dimension

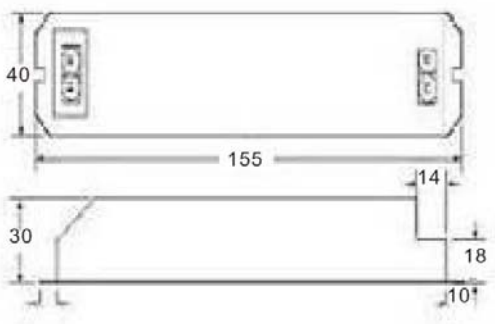

Operation Instruction

ON/OFF: Press it to open or close the output

Mode: Press it to change the mode to next one;

BRT+ / BRT- :

While at M1-M5:

+: Press it to increase the brightness of the LED (Continuous increase by long press);

-: Press it to decrease the brightness of the LED (Continuous decrease by long press);

While at M6-M7:

+: Press it to make the change speed of the LED to a faster level;

-: Press it to make the change speed of the LED to a slower level.

Wiring Instruction

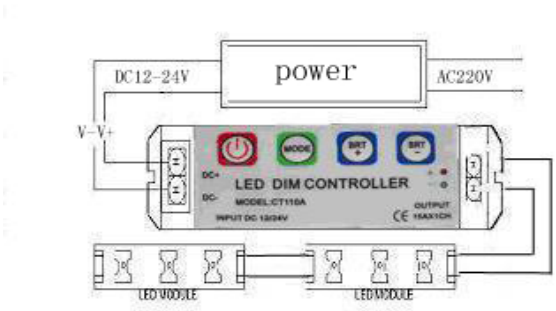

Note: can access various monochromatic LED modules.

Remark:

(1)The input voltage should be limited in rated range.

(2)Do not use it by over load.

(3)Install in air drying environment.

(4)If the load line was too long, you should link it like a ring

Change Mode Instruction

Mode	Mode Description
M1	0%
M2	25%
M3	50%
M4	75%
M5	100%
M6	Flash
M7	Fade